



PRODUCT CATALOG

Wire and Wire Products



ANNEALED WIRE | Construction Binding Wire**TECHNICAL SPECIFICATIONS****Raw Material Quality**

SAE 1006

Diameter

1,00 mm - 2,00 mm

Diameter Tolerance

+/- 0,05 mm

Coil Inner Diameter

20 cm (+/- 0,03 cm)

Coil Outer Diameter

40 cm (+/- 0,03 cm)

Weight

5 kg - 35 kg (+/- 1 kg)

Tensile Strength

300 - 450 MPa

Package Type

Pallet - Bigbag - Mastercoil



ANNEALED WIRE | Reinforcement Wire**TECHNICAL SPECIFICATIONS****Raw Material Quality**

SAE 1006 - SAE 1008

Diameter

2,00 mm - 6,00 mm

Diameter Tolerance

+/- 0,05 mm

Coil Inner Diameter

42 cm (+/- 0,03 cm)

Coil Outer Diameter

75 cm (+/- 0,05 cm)

Weight

300 kg - 750 kg (+/- 50 kg)

Tensile Strength

300 - 450 MPa

Package Type

Coil

Packaging

Steel Strap

Options

Lifting Ring, Wire Binding

COLD DRAWN WIRE | Black Wire**TECHNICAL SPECIFICATIONS****Raw Material Quality**

SAE 1006 - 1008 - 1010 - 1015 - 1018

Diameter

2,00 mm - 6,00 mm

Diameter Tolerance

+/- 0,05 mm

Coil Inner Diameter

42 cm (+/- 0,03 cm)

Coil Outer Diameter

75 cm (+/- 0,05 cm)

Weight

300 kg - 750 kg (+/- 50 kg)

Tensile Strength

500 - 1000 MPa

Package Type

Coil


Packaging

Steel Strap

Options

Lifting Ring, Wire Binding

OILED BALING WIRE

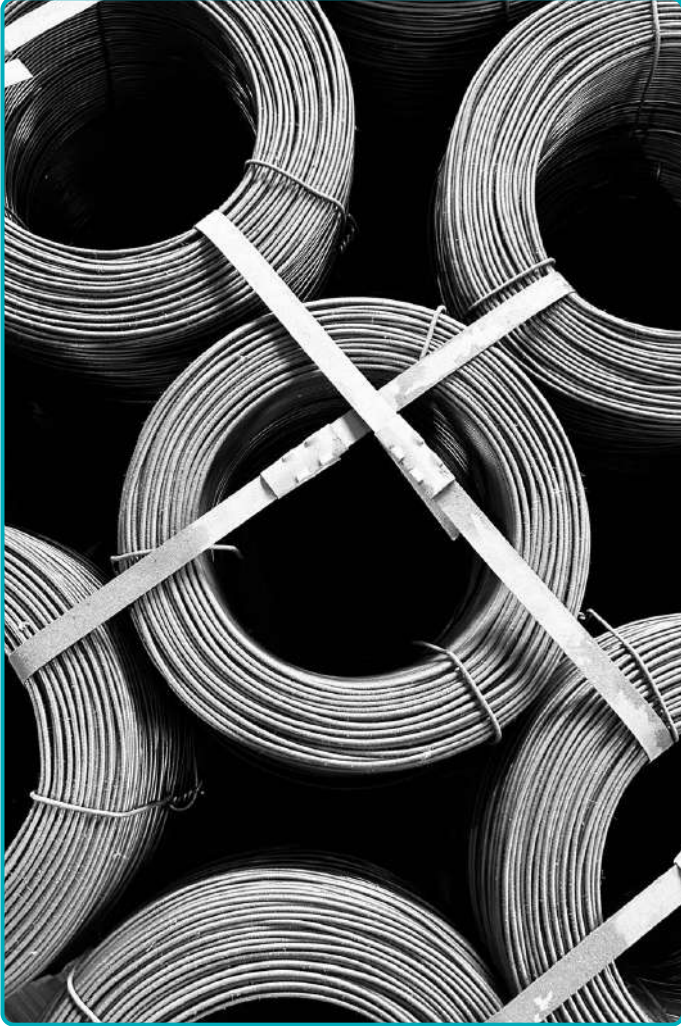

TECHNICAL SPECIFICATIONS

Raw Material Quality

SAE 1006 - 1008 - 1010 - 1015 - 1018

Type

Layer Winding

Diameter

3,00 mm - 4,00 mm

Diameter Tolerance

+/- 0,05 mm

Coil Inner Diameter

21 cm (+/- 0,02 cm)

Coil Outer Diameter

32 cm (+/- 0,02 cm)

Coil Height

17 cm (+/- 0,02 cm)

Reference Weight

43 kg

Weight

30 kg - 50 kg (+/- 5 kg)

Tensile Strength

350 - 550 MPa

Package Type

Pallet





CONTACT INFORMATION

PHONE



+90 536 960 30 53

E-MAIL



info@afacelik.com.tr

WEB



afacelik.com.tr